



CCK8002 Close-To-Ceiling Kit INSTRUCTION SHEET

USE THESE INSTRUCTION IN CONJUNCTION WITH YOUR FANIMATION FAN OWNERS MANUAL AND IN PLACE OF THE STEPS FOR HOW TO HANG YOUR CEILING FAN. IF YOU NO LONGER HAVE YOUR MANUAL, ONE CAN BE DOWNLOADED AT WWW.FANIMATION.COM.

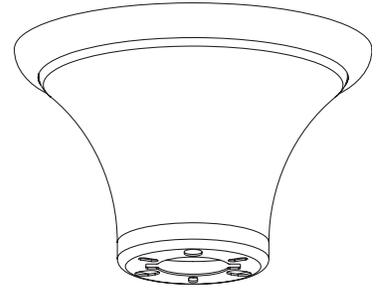


Safety Instructions


1. To avoid possible shock, be sure electricity is turned off at the fuse box before wiring, and do not operate fan without blades.
2. All wiring and installation procedures must satisfy National Electrical Codes (ANSI/ NFPA 70-1999) and Local Codes. The ceiling fan must be grounded as a precaution against possible electrical shock. Electrical installation should be made or approved by a licensed electrician.
3. The fan base must be securely mounted and capable of reliably supporting at least 50 lbs. Consult a qualified electrician if in doubt.
4. The fan must be mounted with the fan blades at least 7 feet from the floor to prevent accidental contact with the fan blades.
5. Follow the recommended instructions for the proper method of wiring your ceiling fan. If you do not have adequate electrical knowledge or experience, have your fan installed by licensed electrician.

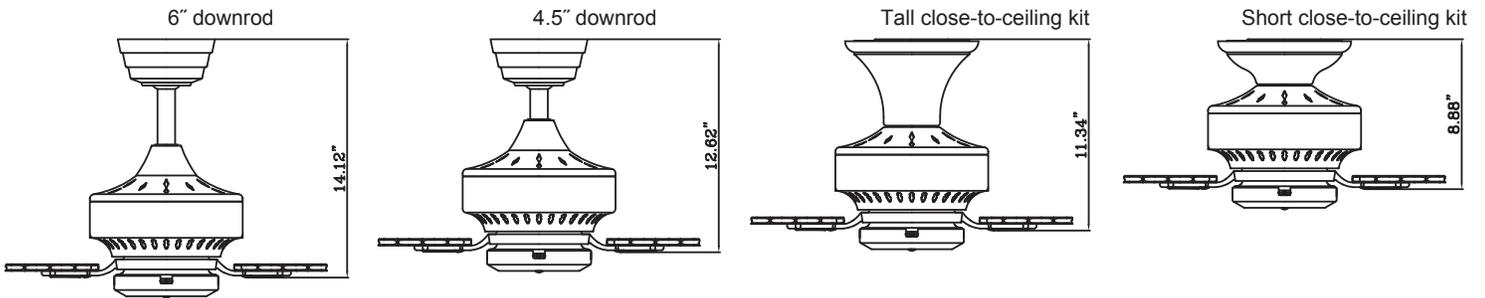


1. After removing your kit from the packaging, use slight pressure to push down and remove the screw trim cover ring from the ceiling canopy assembly. (Figure 1)

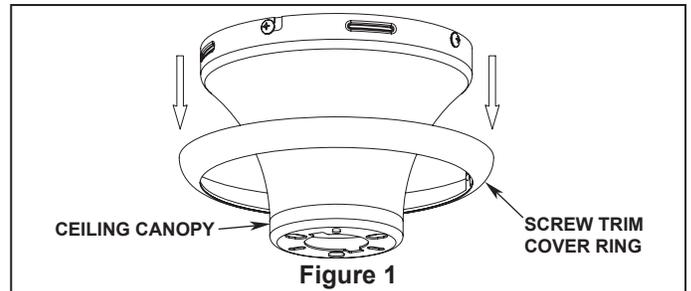


2. Separate the ceiling bracket from the ceiling canopy by loosening the two canopy-to-bracket screws where the canopy is slotted and completely remove the other two screws where it is not slotted and set aside for later. (Figure 2)

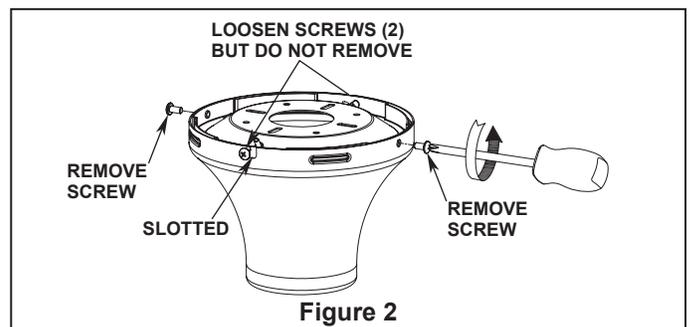


3. Twist the ceiling bracket counter-clockwise and lift out of the ceiling canopy. There is another short canopy option when it is needed to very close to ceiling. (Figure 3)

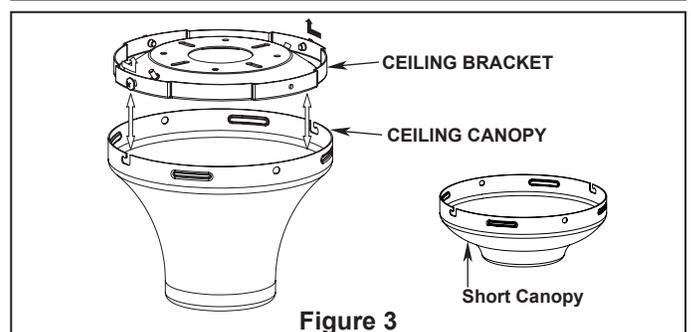


- On your fan's motor, remove the two downrod support set screws and nuts from the downrod support and discard. (Figure 4)

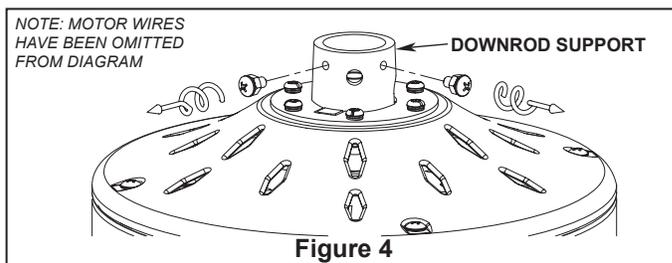


- Remove the three motor coupling screws from your fan and save for next step. (Figure 5)

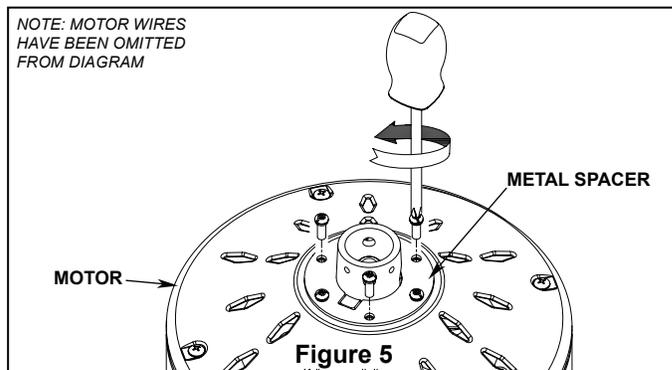


- Route your fan wires through the ceiling canopy and place ceiling canopy onto your motor. (Figure 6)

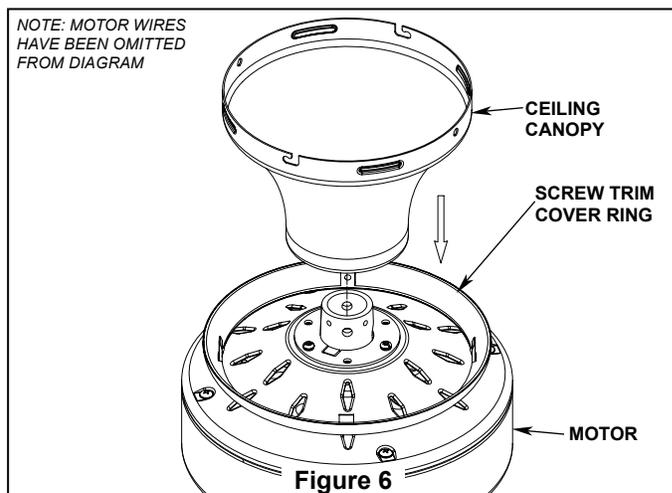


- Align the 3 big slots in the canopy to the 3 screws in the motor coupler. Firmly attach the canopy cover to the motor with the three screws removed in step 5 and steel washers from the part bag. (Figure 7)

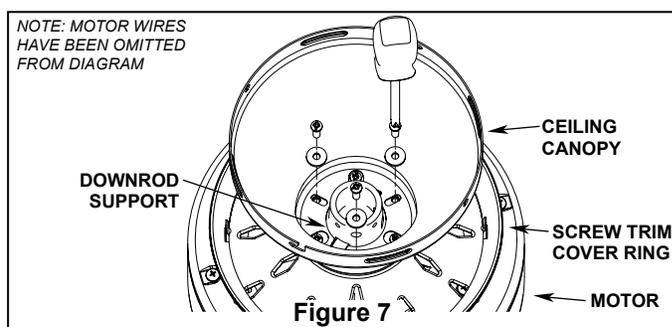


 WARNING
<p>To avoid possible fire or shock, be sure electricity is turned off at the main fuse box before hanging. (Figure 8)</p>

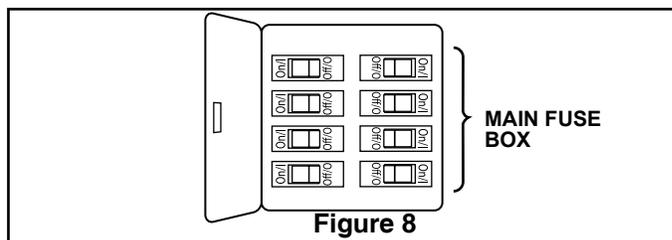


8. Using the two screws and washers, securely attach the ceiling bracket to the ceiling junction box, making sure to run the supply wires through the hole in the center of the bracket. (Figure 9)

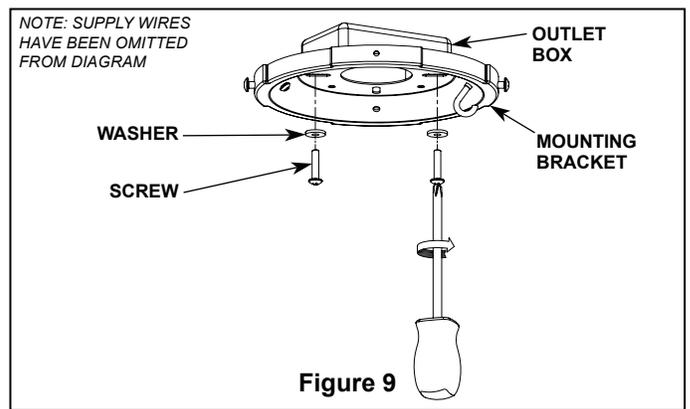

9. Loop the safety cable through pin hole in motor coupler and put the cable clamp in the end of safety cable. (Figure 10).

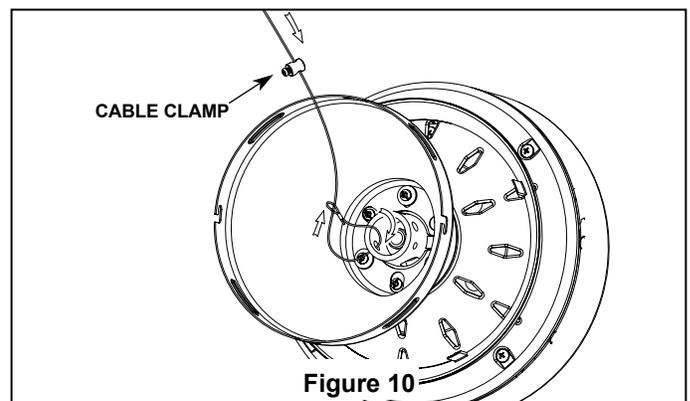


10. Loop the safety cable end through one of the holes in the hanger plate up into the outlet box, then back out the center of the plate, then connect the end with the screw down clamp. Tighten the set screw in the clamp. (Figure 11).

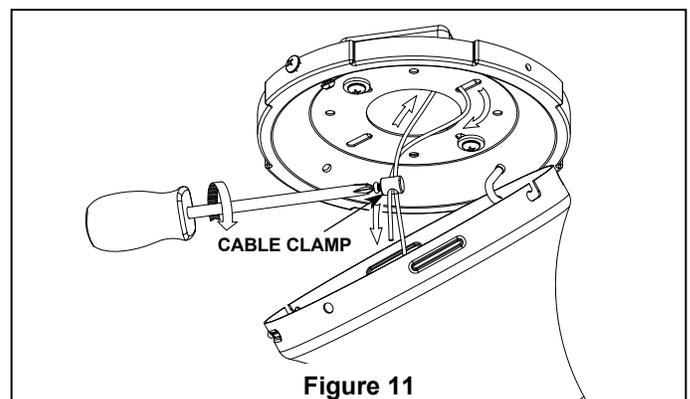


11. Lift your fan motor assembly and hang it from the ceiling bracket hook through one of the two screw holes in the canopy lip. Do not use the grooved slots. (Figure 12)


12. Connect your fan's wiring according to your fan's owners manual. If you have misplaced your owners manual one can be downloaded at www.fanimation.com or contact a licensed electrician to complete the wiring of your fan.

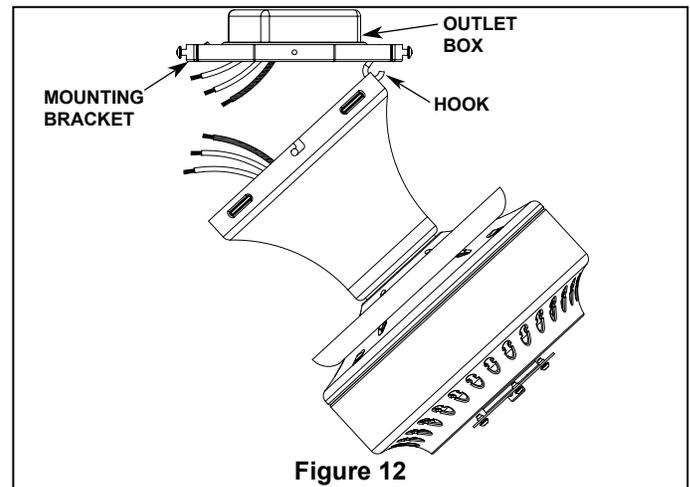


13. Lift the fan off the bracket hook and mount your fan by sliding the ceiling canopy over the mounting bracket with the two loosened screws going into the slots in the canopy. Be sure all wiring is tucked into the ceiling canopy and is not pinched. Once the canopy is flush with your ceiling, turn clockwise to seat the screws into the keyed portion of the slot. Tighten the screws. (Figure 13)

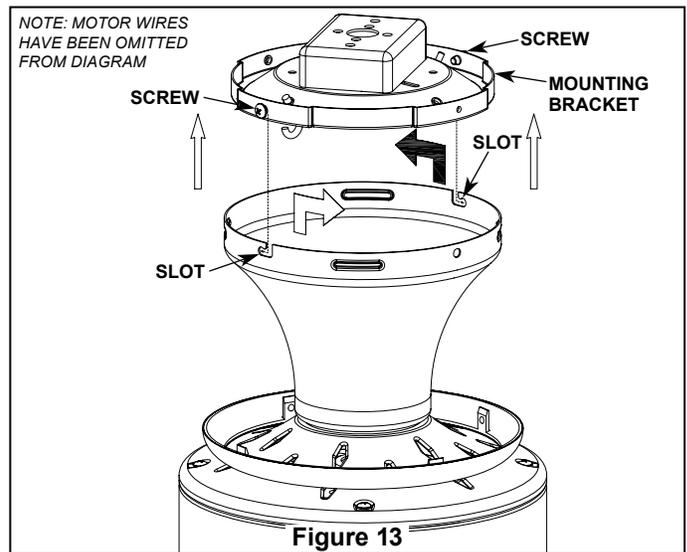

14. Install the remaining two screws removed in step 2 to secure the ceiling canopy to the ceiling bracket. (Figure 14)

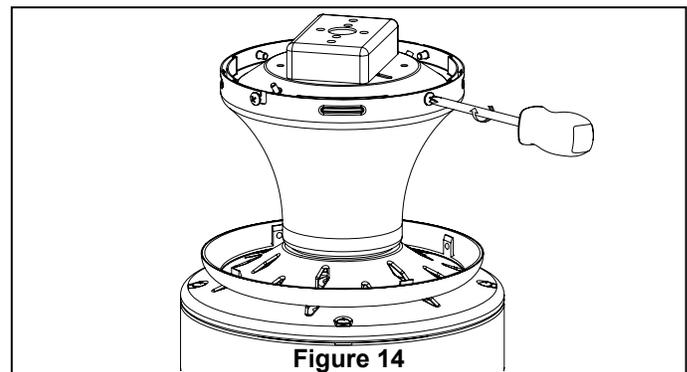

15. Push the screw cover trim ring up to conceal the screws, such that the mounting tabs seat into the dimpled grooves in the ceiling canopy midway between the screws. (Figure 15)

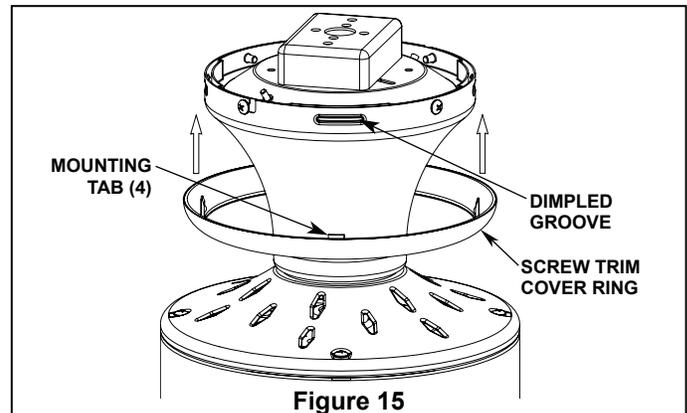

16. Installation of your close-to-ceiling kit is complete. Reference your owners manual for any additional assembly steps required for your Fanimation ceiling fan.



**10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215**

Outside U.S. call (317) 733-4113

Visit Our Website @ www.fanimation.com