


Assembly Instructions: 1208-3P DNI (Marcellis)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase to arrange for replacement parts.

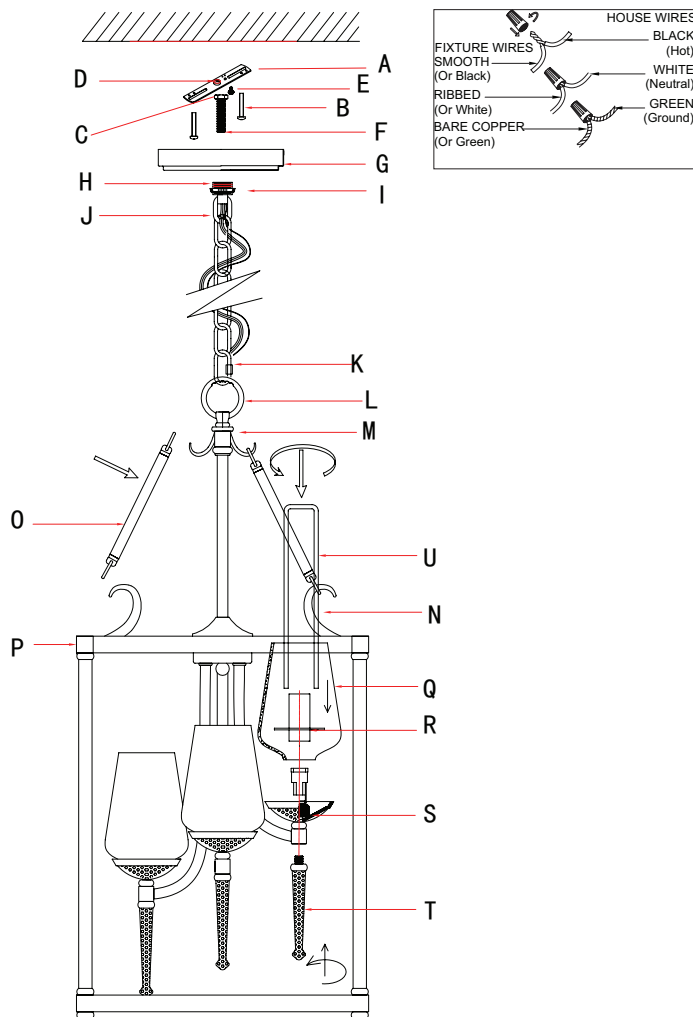

PREPARING FOR INSTALLATION

Carefully remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the wall, including the old mounting strap.

From the parts bag remove the mounting strap assembly. One end of nipple (F) should be attached to mounting strap (A) with washer and hex nuts (C & D) in place. The other end should have canopy loop (H) attached.

Attach mounting strap (A) to the junction box using mounting screws (B) and a screwdriver. Tighten securely. Unscrew canopy loop collar (I) from canopy loop (H). Pass canopy (G) over the mounted canopy loop to test the height. Approximately half of the canopy loop's exterior threads should be exposed, and the canopy loop collar should fit snugly onto the canopy loop.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

Remove canopy (G) and adjust the height of nipple (F) and canopy loop (H) until the desired height is reached.

By measuring, determine the correct amount of chain and wire needed for proper hanging height. If necessary, use a pair of pliers to open and remove any excess chain. Attach one of chain connectors (K) to each end of chain (J). Pass the fixture wires through top loop (H). Attach one end of chain (J) to top loop (L) using chain connector (K) and close chain connector (K). Attach one end of each rod (O) to decorative hooks (N) on fixture body (P). Use the free end of rod (O) to attach the rod to the hooks on top cap (M). Use the free chain connector (K) to attach chain (J) to canopy loop (H). Feed the fixture wires up through the chain (every three links or so), pulling the wires until taut. Trim the wires to the desired length plus 8 to 10 inches.

CONNECTING THE WIRES

Have an assistant support the fixture weight while completing the wiring. Thread the fixture wires through canopy (G). Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (B) and wrap the fixture ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

FINISHING THE INSTALLATION

Note: Complete the remaining steps *after* the fixture is hung.

Tighten the decorative hammered finials (T) onto the threads at the bottom of the fixture arms.

Carefully slide glass shades (Q) over sockets (S). Candle sleeves (R) have retaining rings attached. Each retaining ring has two small holes in each side. The glass shade opening is tight. Carefully push the candle sleeves down into the glass shades and over the sockets. Carefully place the tips of socket tool (U) into the holes in the retaining ring. Use socket tool (U) to thread the retaining rings onto the socket threads. This will secure the glass in place.

Install light bulbs in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.